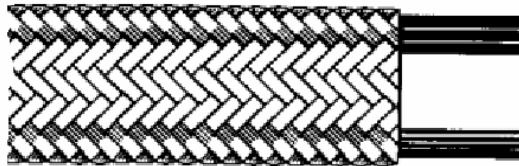


TEFLON HOSE

STAINLESS STEEL TEFLON HOSE



APPLICATION: For medium pressure hydraulic service, as well as “problem” chemical transfer, food products, steam lines and pharmaceutical applications .

TUBE: Extruded virgin Teflon.

REINFORCEMENT: Braided, 304 stainless steel wire.

TEMPERATURE: -65°F to 450°F (-54°C to 230°C).


PACKAGING: 50ft coils.

COUPLINGS: TH inserts (brass or stainless steel).


NOM. ID		NOM. OD		MAX. WP		BEND RADIUS		WEIGHT		PART NUMBER	PRICE REEL	PRICE CUT
in.	mm.	in.	mm.	psi	Mpa	.in	.mm	lb/ft	kg/m		PER FT	PER FT
1/4	6.35	.31	7.87	3000	20.7	1.5	38.1	.077	0.11	SST-04	4.66	4.66
5/16	7.94	.38	9.65	3000	20.7	2.0	50.8	.098	0.15	SST-05	5.41	5.41
3/8	9.53	.45	11.43	2500	17.2	3.5	88.9	.110	.16	SST-06	6.74	6.74
1/2	12.70	.59	14.99	2000	13.8	4.5	114	.124	.18	SST-08	8.35	8.35
5/8	15.88	.65	16.51	1750	12.1	5.0	127	.154	.23	SST-10	9.62	9.62
3/4	19.05	.78	19.81	1500	10.3	6.0	152	.170	.25	SST-12	12.38	12.38
1	25.40	1.03	26.16	1000	6.89	9.0	229	.273	.41	SST-16	16.85	16.85

HOSE CONNECTORS - "TH" SERIES BRASS OR STAINLESS STEEL


N.P.T. MALE - 30° CONE SEAT

NPT	Brass				Stainless Steel			
	PART. N°	Hose Size	Thread Size	List Price	PART. N°	Hose Size	Thread Size	List Price
	TH0402NPTBR	-4	1/8-27	4.26	TH0402NPTS/S	-4	1/8-27	11.23
	TH0404NPTBR	-4	1/4-18	4.71	TH0404NPTS/S	-4	1/4-18	11.35
	TH0502NPTBR	-5	1/8-27	11.93	TH0504NPTS/S	-5	1/4-18	11.79
	TH0504NPTBR	-5	1/4-18	5.71	TH0604NPTS/S	-6	1/4-27	28.87
	TH0604NPTBR	-6	1/4-27	6.23	TH0606NPTS/S	-6	3/8-18	17.55
	TH0606NPTBR	-6	3/8-18	7.54	TH0806NPTS/S	-8	3/8-18	25.34
	TH0806NPTBR	-8	3/8-18	8.80	TH0808NPTS/S	-8	1/2-14	31.40
	TH0808NPTBR	-8	1/2-14	12.85	TH1008NPTS/S	-10	1/2-14	39.84
	TH1008NPTBR	-10	1/2-14	11.98	TH1212NPTS/S	-12	3/4-14	40.80
	TH1212NPTBR	-12	3/4-14	17.29	TH1616NPTS/S	-16	1-11-1/2	85.24
	TH1616NPTBR	-16	1-11-1/2	32.61				

J.I.C. FEMALE - 37° CONE SEAT - DOUBLE HEXAGON



FIC	Brass				Stainless Steel			
	PART. N°	Hose Size	Thread Size	List Price	PART. N°	Hose Size	Thread Size	List Price
	TH0403FICBR	-4	3/8-24	10.72	TH0403FICS/S	-4	3/8-24	43.49
	TH0404FICBR	-4	7/16-20	5.31	TH0404FICS/S	-4	7/16-20	22.55
	TH0505FICBR	-5	1/2-20	9.20	TH0505FICS/S	-5	1/2-20	33.06
	TH0606FICBR	-6	9/16-18	7.54	TH0606FICS/S	-6	9/16-18	29.08
	TH0808FICBR	-8	3/4-16	9.71	TH0808FICS/S	-8	3/4-16	39.89
	TH1010FICBR	-10	7/8-14	14.11	TH1010FICS/S	-10	7/8-14	55.00
	TH1212FICBR	-12	1-1/16-12	19.72	TH1212FICS/S	-12	1-1/16-12	69.76
	TH1616FICBR	-16	1-5/16-12	32.26	TH1616FICS/S	-16	1-5/16-12	105.88

S.A.E. FEMALE - 45° CONE SEAT - DOUBLE HEXAGON - BRASS


FJ	PART. N°	Hose Size	Thread Size	List Price
	TH0606FJBR	-6	9/16-18	8.10
	TH1212FJBR	-12	1-1/16-12	19.72

HOSE CONNECTORS - "TH" SERIES BRASS OR STAINLESS STEEL

AIR BRAKE COMPRESSION - MALE & FEMALE - BRASS

	PART. N°	Hose Size	Thread Size	List Price
<p style="text-align: center;">Male</p> 	TH40M	-10	13/16-18	44.99
<p style="text-align: center;">Female-Includes nut and sleeve</p> 	TH40F	-10	13/16-18	34.53

PAINT SWIVEL - CARBON STEEL

	PART. N°	Hose Size	Thread Size	List Price
	TH0504PSS	-5	1/4" NPS	11.63

FOR MARINE POWERTRIM APPLICATIONS

Description	PART. N°	Hose Size	Thread Size	List Price
Male Inverted Flare - S/S	TH0403MIFS/S	-4	3/8-24	32.00
Male Inverted Flare - 45° - S/S	TH0403MIF45S/S	-4	3/8-24	37.62
Male Inverted Flare - 90° - S/S	TH0403MIF90S/S	-4	3/8-24	35.44